


F Rating — 2 Hr
T Rating — 0 Hr

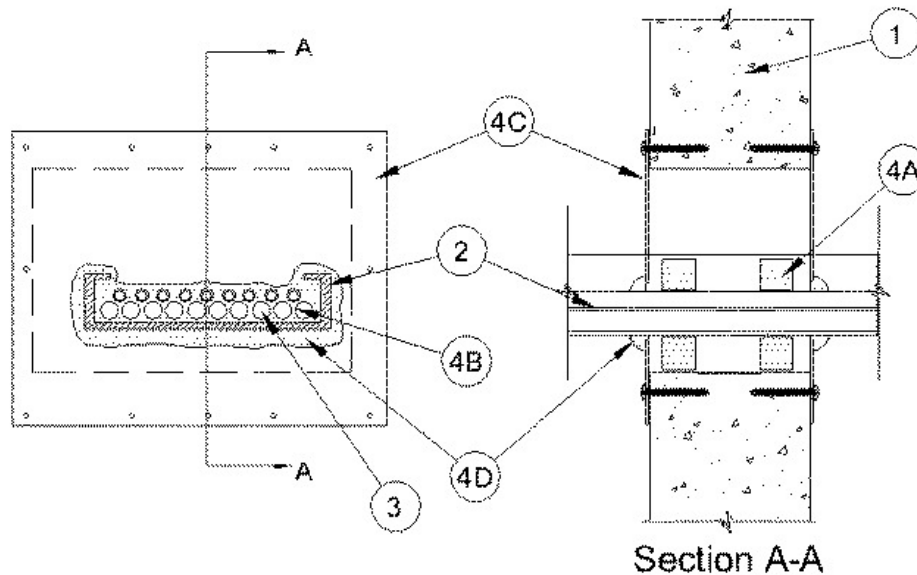

1. **Wall Assembly** — Min 4-1/2 in. thick reinforced lightweight or normal weight (100-150 pcf) concrete. Wall may also be constructed of any UL Classified Concrete Blocks*. Max size of opening is 12 in. by 24 in.

2. **Cable Tray** — Max 18 in. wide by max 4 in. deep open-ladder cable tray with channel-shaped side rails formed of min 0.13 in. thick fiberglass with nom 2 in. diam rungs spaced 9 in. O.C. or max 18 in. wide by max 4 in. deep open ladder steel or aluminum cable tray. The min annular space between the cable tray and the periphery of opening shall be 0 in. (point contact). The max annular space between the cable tray and the side periphery of the opening shall be 5 in. Cable tray to be rigidly supported on both sides of wall assembly.

3. **Cables** — Max 40 percent fill (based on a 3 in. loading depth within the cable tray) of any combination of cables. The following types of cables may be used:

- A. Max 750 MCM power cables; THHN or THWN jacketed.
- B. Max 8C, No.12 AWG multiconductor power and control cables; PVC jacketed.
- C. Multiple fiber optical communication cable jacketed with PVC.
- D. Max 25 pr/24 AWG telephone cable with polyethylene insulation and PVC jacket.
- E. Max 300 pr/24 AWG telephone cable with polyethylene insulation and PVC jacket

4. **Firestop System** — The firestop system shall consist of the following items:

A. **Fill, Void or Cavity Material* — Intumescent Block** — The block material cross-section is nom 1 in. square. The fill material is cut into 10 in. long blocks installed within the opening on each side of the wall centered on top of cables and 8 in. long blocks installed within the opening centered on each side on bottom of opening.

RECTORSEAL — Metacaulk Bixi Stix

B. **Fill, Void or Cavity Materials* — Putty Strip** — (Optional) 1 in. by 1 in. by 1/8 in. thick putty pad strip installed between adjacent cables.

RECTORSEAL — [Metacaulk Fire Rated Putty](#), Fire Rated Putty Pad

C. **Steel Cover Plate** — Cover plate is formed of min 0.028 in., 24 gauge galv. steel overlapping onto wall a min 1-1/2 in., cut to fit contour of the cable bundle with a nom 1/4 in. gap. Cover plate is attached to each side of wall with min 1/4 in. diam by 1-1/4 in. long steel Tapcon® concrete anchors spaced max 4 in. O.C. Where cover sheet splices exist, attach separate 24 gauge galv. steel overlapping splice by a min 1-1/2 in. and attached with sheet metal screws spaced max 3 in. O.C. on both sides of the splice joint. As an option to separate steel splice, cover plate halves may overlap by a min 1-1/2 in. and attach

together with sheet metal screws spaced max 3 in. O.C.

D. Fill, Void or Cavity Materials* — Putty — Putty shall be packed around the perimeter of the cable bundle at its egress from the steel cover plate. The "dome" of putty shall be min 1 in. thick and extend a min of 1/2 in. onto the steel cover plate.
RECTORSEAL — [Metacaulk Fire Rated Putty](#)

*,+ Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

Reprinted from the Online Certifications Directory with permission from UL. ©UL LLC