


F Rating — 1 Hr
T Rating — 3/4 Hr

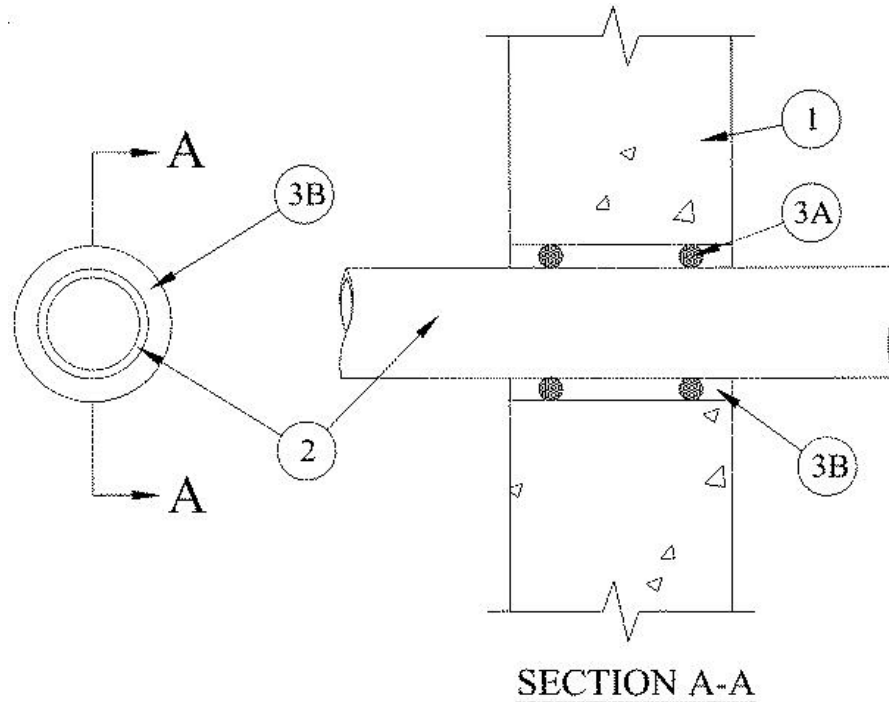

1. **Wall Assembly** — Min 4-3/4 in. thick reinforced lightweight or normal weight (100-150 pcf) concrete. Wall may also be constructed of any UL Classified **Concrete Blocks***. Max diam of opening is 4 in.

See **Concrete Blocks** category in the Fire Resistance Directory for names of manufacturers.

2. **Nonmetallic Penetrant** — One nonmetallic penetrant to be centered within the firestop system. The annular space between the nonmetallic penetrant and periphery of opening shall be 13/16 in. Through-penetrant shall be rigidly supported on both sides of wall assembly. The following type and size of nonmetallic penetrants may be used:

A. **Acrylonitrile Butadiene Styrene (ABS) Pipe** — Nom 2 in. diam (or smaller) Schedule 40 cellular or solid core ABS pipe for use in closed (process or supply) or vented (drain, waste or vent) piping systems.

3. **Firestop System** — The firestop system shall consist of the following:

A. **Packing Material** — Foam backer rod firmly packed into opening as a permanent form. Packing material is to be recessed from both surfaces of wall as required to accommodate the required thickness of fill material.

B. **Fill, Void or Cavity Material - Caulk** — Min 1/2 in. thickness of fill material applied within the annulus flush with both surfaces of wall.

RECTORSEAL — Metacaulk 1000

*,+ Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

Reprinted from the Online Certifications Directory with permission from UL. ©UL LLC